
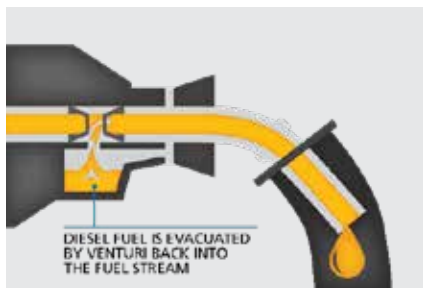
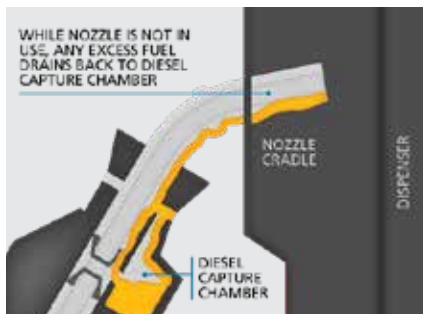
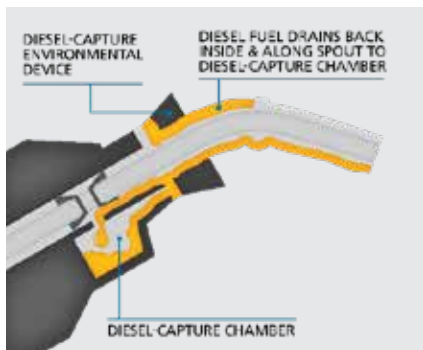


## OPW 14C Diesel Capture Technology Nozzle

The OPW 14C is part of the new OPW 14 Series cleaner fueling experience nozzles, featuring innovative patented\* diesel-capture technology. This innovation is designed to provide a cleaner, greener fueling experience for customers while keeping diesel fuel off their hands and off the ground.

### Diesel Capture Technology

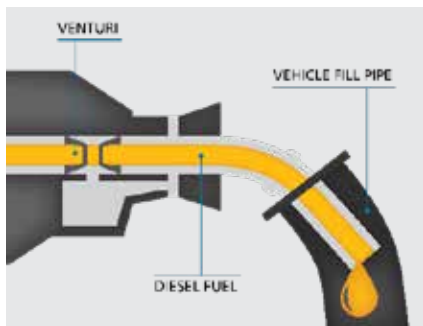

## MATERIALS

**Body:** Aluminum  
**Lever & Lever Guard:** Duratuff®  
**Packing:** Graphite with Teflon®  
**Disc:** Viton®  
**Spout:** Aluminum  
**Inlet Size:** 3/4" NPT  
**Weight:** 2.73 lbs. each  
1.25 kg each



14C Series shown with permanently installed Splash Guard

## FEATURES & BENEFITS

### Safe for Use

- ◆ Diesel Fuel Capture Technology\* – the patented technology allows excess diesel fuel to drain into a uniquely engineered chamber located in the body of the nozzle located at the base of the spout. This excess diesel fuel is then introduced back into the fuel stream.
- ◆ Drip Guard – designed to capture any fuel that runs out onto the outside of the nozzle.
- ◆ Compatible for diesel-fuel blends up to B20.
- ◆ Rugged Durability – designed to meet the rigorous demands of high-volume sites.
- ◆ FlowLock™ allows nozzle to shut off when falling out of a vehicle or is tipped up, limiting spillage and unsafe conditions.

### Durable and Long-Lasting Design

- ◆ Cycle tested and proven to last longer than 1 million cycles.

- ◆ Durable lever guard that won't scratch your customers' vehicles – made from Duratuff®.

### Cleaner Fueling Experience for the Customer

- ◆ Easy to use – utilizing Accu-Stop® to-the-penny Flow Control Technology.
- ◆ Attractive two-piece hand insulator which includes NEWGARD™ barrel cover and colored scuff guard, is the most comfortable nozzle in the industry to use..
- ◆ Convenient – one-finger hold-open clip that is easy to set the flow rate.

### Design Working Pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

## LISTINGS & CERTIFICATIONS



\*US PATENTS 7,134,580 AND 9,126,820.  
OTHER PATENTS-PENDING

## ORDERING SPECIFICATIONS

| Scuff Guard Color | 14C Diesel Nozzles |
|-------------------|--------------------|
| Green             | 14C-0100           |
| Silver            | 14C-0200           |
| Red               | 14C-0300           |
| Black             | 14C-0400           |
| Blue              | 14C-0500           |
| Gold              | 14C-0750           |
| Orange            | 14C-0800           |
| Yellow            | 14C-0900           |

## GPM FLOW CHART

